

Overview

- High Power AC and DC Power Source**
 Programmable AC and DC power for frequency conversion and product test applications
- Expandable Power Levels**
 Available output power of 15, 22.5, 30, and 45 kVA per unit and multi-unit configurations for power requirements up to 180 kVA
- Single and Three Phase Mode**
 Phase mode programming on MX22.5-3Pi, MX30-3Pi and MX45-3Pi allows switching between single and three phase output modes
- Arbitrary & Harmonic Waveform Generation**
 User defined voltage waveform and distortion programming
- Regenerative, bidirectional “Green” Power Solution**
 Automatic crossover between Source and Sink power mode offers regenerative capabilities in AC mode. Regenerate up to 100% of the rated output power back to the utility grid during sink mode operation. (-SNK option)
- Remote Control**
 Standard IEEE-488 (GPIB), RS232C & USB along with optional LAN Interfaces are available for automated test applications

Introduction

The MX Series consists of multiple high-power AC and DC power systems that provide controlled AC and DC output for ATE and product test applications. This high-power AC and DC test system covers a wide spectrum of AC and DC power applications at an affordable cost. Using state-of-the-art PWM switching techniques, the MX series combines compactness, robustness and functionality in a compact floor-standing chassis, no larger than a typical office copying machine. This higher power density has been accomplished without the need to resort to elaborate cooling schemes or additional installation wiring. Simply roll the MX unit to its designated location (using included casters), plug it in, and the MX series is ready to work for you.

Simple Operation

The MX Series can be operated completely from its menu driven front panel controller. A backlit LCD display shows menus, setup data, and read-back measurements. IEEE-488, RS232C, USB and LAN remote control interfaces and instrument drivers for popular ATE programming environments are available. This allows the MX Series to be easily integrated into an automated test system.



For advanced test applications, the programmable controller version offers full arbitrary waveform generation, time and frequency domain measurements, and voltage and current waveform capture.

Configurations

The MX15 delivers up to 15 kVA of single-phase output. The MX22.5, MX30 and MX45 deliver up to 22.5 kVA, 30 kVA and 45 kVA, respectively. These operate using single or three phase output in AC or AC+DC mode. In DC mode, 66.6% of the AC power level is available.

For higher power requirements, the MX60, MX90, MX135, and MX180 multi cabinet models are available. Multi cabinet MX45 systems always operate in three phase output mode. Available reconfigurable MX60, MX90, MX135, and MX180 models (-MB designation) provide multiple controllers which allow separation of the high-power system into two, three, or four individual MX45 units for use in separate applications. This ability to reconfigure the system provides an even greater level of flexibility not commonly found in power systems.

Product Evaluation and Test


Increasingly, manufacturers of high-power equipment and appliances are required to fully evaluate and test their products over a wide range of input line conditions.

Output voltage options, such as the -333 option, allow testing of high voltage 480VAC L-L products at 120% of nominal as required by IEEE 1547 (Table 1) “Interconnection system response to abnormal voltages”.

The built-in output transient generation and read-back measurement capability of the MX Series offers the convenience of a powerful, and easy to use, integrated test system.

150-400 V

0-400A/ Phase

	208	230	380
	400	480	600

ETHERNET   RS232

AMETEK

Programmable Power
 9250 Brown Deer Road
 San Diego, CA 92121-2267 USA

AMETEK[®]
 PROGRAMMABLE POWER

Regenerative, bidirectional “Green” Power Solution

The MX Series features the ability to both source and sink current, i.e., bi-directional current flow. The MX amplifier is designed to reverse the phase relationship between the AC input voltage and current to feed power back onto the utility grid. This mode of operation is particularly useful when testing grid-tied products that feed energy back onto the grid. Static Power Converters such as grid-tied and off-grid photovoltaic inverters are tested for frequency variations and voltage transients.

REGENERATE CONTROL	
UNDER VOLT= 100.0VAC	dFREQ = 0.50Hz
OVER VOLT = 270.0VAC	DELAY F= 5.000S
PREVIOUS SCREEN	DELAY R= 5.000S

Programming sink (-SNK) mode operation

With an output frequency range to 819 Hz (or 905 Hz with -HF option), the MX Series is well suited for aerospace applications. Precise frequency control and accurate load regulation are key requirements in these applications. The available IEEE-488 remote control interface and SCPI command language provide for easy integration into existing ATE systems. The MX Series eliminates the need for several additional pieces of test equipment, saving cost and space. Instrument drivers for popular programming environments such as National Instruments LabView™ are available to speed up system integration.

Regulatory Testing

As governments are moving to enforce product quality standards, regulatory compliance testing is becoming a requirement for a growing number of manufacturers. The MX Series is designed to meet AC source requirements for use in compliance testing such as IEC 61000, 3-2, 3-3, 3-11, 3-12, to name a few.

Choice of Voltage Ranges

The RS Series includes 0 - 150V & 0 - 300V or optionally, 0 - 166V & 0 - 333V line to neutral. These models provide a maximum 3 phase output capability of 260 Vac & 520 Vac or 287 & 576V line to line respectively. For applications requiring more than 333 V L-N (or 576 V L-L), the optional -HV output transformer provides an additional 0 - 400 V L-N and 0 - 693 V L-L output range for use in AC mode only. For custom applications the XV

option is available and is user defined and offers up to 600VL-N (1,038VL-L)

High Crest Factor

With support for high crest factor loads, the BPS Series AC source can drive difficult nonlinear loads with ease. Since many modern products use switching power supplies, they tend to pull high repetitive peak currents. The BPS30 with a crest factor rating of 4.5 for example, can deliver up to 300 Amps of repetitive peak current (150 V AC range) per phase to handle three phase loads. Refer to the specifications for peak repetitive currents for each model.

Remote Control


Standard RS232C & USB IEEE-488, and USB along with optional LAN remote control interfaces allow programming of all instrument functions from an external computer. The popular SCPI command protocol is used for programming.

Hardware In the Loop

Optional External Drive (-EXTD) allows external analog signal control of the source while in AC operation, essentially turning the source into a high bandwidth amplifier. Most common applications include hardware in the loop (HIL) simulation of power plants, hybrid electric vehicles and most recently renewable energy generation and their effect on the utility grid. Reference EXTD white paper for additional performance details by visiting our website.

Application Software

- Windows® application software (*) is included. This software provides easy access to the power source's capabilities without the need to develop any custom code. The following functions are available through this GUI program:
 - * Requires PC running Windows™ 7, 8.x, or 10
- Steady state output control (all parameters)
- Create, run, save, reload and print transient programs
- Generate and save harmonic waveforms.
- Generate and save arbitrary waveforms.
- Measure and log standard measurements
- Capture and display output voltage and current waveforms.
- Measure, display, print and log harmonic voltage and current measurements.
- Display IEEE-488, RS232C, USB and LAN bus traffic to and from the AC Source to help you develop your own test programs.

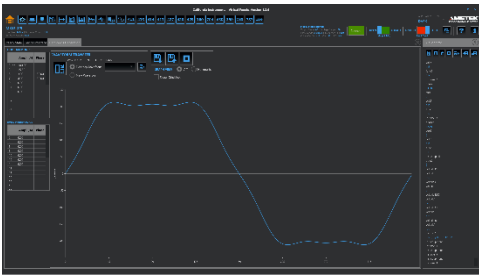

Windows™ application software.


Harmonic Waveform Generation

Using the latest DSP technology, the MX Series programmable controller can generate harmonic waveforms to test for harmonics susceptibility. The Windows Graphical User Interface program can be used to define harmonic waveforms by specifying amplitude and phase for up to 50 harmonics. The waveform data points are generated and downloaded by the GUI to the AC source through the IEEE-488 or RS232C bus. Up to 200 waveforms can be stored in nonvolatile memory and given a user defined name for easy recall.

All MX-MX22.5/30/45-3Pi Series configurations offer three phase waveform generation, allowing independent phase anomalies to be programmed. It also allows simulation of unbalanced harmonic line conditions.

Arbitrary Waveform Generation

Using the provided GUI program or custom software, the user also can define arbitrary AC waveforms. The arbitrary waveform method of data entry provides an alternative method of specifying AC anomalies by providing specific waveform data points. The GUI program provides a catalog of custom waveforms and allows real-world waveforms captured on a digital oscilloscope to be downloaded to one of the many AC source's waveform memories. Arbitrary waveform capability is a flexible way of simulating the effect of real-world AC power line conditions on a unit under test in both engineering and production environments.

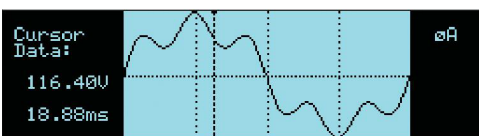

Harmonically distorted waveform.


MX Series - AC and DC Transient Generation

The MX Series controller has a powerful AC and DC transient generation system that allows complex sequences of voltage, frequency and waveshapes to be generated. This further enhances the MX's capability to simulate AC line conditions or DC disturbances. When combined with the multiphase arbitrary waveform capabilities, the AC and DC output possibilities are truly exceptional. Transient generation is controlled independently yet time synchronized on all three phases. Accurate phase angle control and synchronized transient list execution provide unparalleled accuracy in positioning AC output events.

The front panel provides a convenient listing of the programmed transient sequence and allows for transient execution Start, Stop, Abort and Resume operations. User defined transient sequences can be saved to non-volatile memory for instant recall and execution later. The included Graphical User Interface program supports transient definitions using a spreadsheet-like data entry grid. A library of frequently used transient programs can be created on disk using this GUI program



Transient List Data Entry from the front panel.

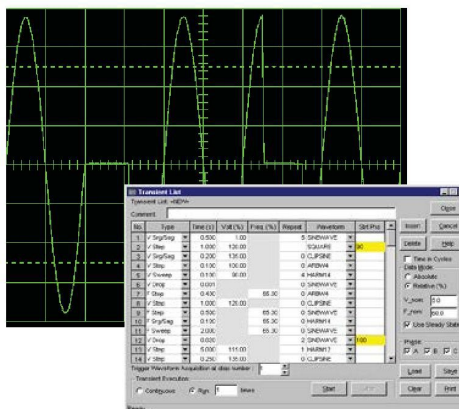

Transient List Data Entry in GUI program.

MX Series II

MX Series - Measurement and Analysis


The MX Series is much more than a programmable AC, DC or AC+DC power source. It also incorporates an advanced digital signal processor-based data acquisition system that continuously monitors all AC source and load parameters. This data acquisition system forms the basis for all measurement and analysis functions. These functions are accessible from the front panel and the remote-control interface for the MX Series (MX15 excluded; uses 2-line display).

Conventional Measurements [All controllers]

Common AC and DC measurement parameters are automatically provided by the data acquisition system. These values are displayed in numeric form on the front panel LCD display. The following measurements are available: Frequency, Vrms, Irms, Ipk, Crest Factor, Real Power (Watts), Apparent Power (VA) and Power Factor.

Harmonic Analysis

The MX Series provides detailed amplitude and phase information on up to 50 harmonics of the fundamental voltage and current (up to 16 kHz in three phase mode) for either one or three phases. Harmonic content can be displayed in both tabular and graphical formats on the front panel LCD for immediate feedback to the operator (excluding MX15). Alternatively, the included GUI program can be used to display,

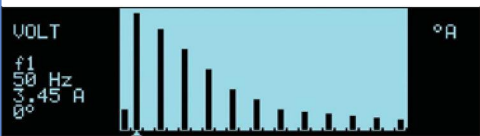


Absolute amplitude bar graph display of current harmonics with cursor positioned at the fundamental (MX30/45 Display).

HR#	VOLT	HARMONIC	MEASUREMENTS	oA	
HR#	AMPL.	PHASE	HR#	AMPL.	PHASE
1	0.00	0.0	1	151.42	0.0
2	0.33	46.9	2	116.17	351.4
4	0.57	90.1	3	85.24	29.6
6	0.59	131.8	4	54.72	67.0
8	0.45	171.4	5	24.55	100.6


Voltage harmonic measurement table display in absolute values (MX22.5/30/45 Display)

print and save harmonic measurement data. Total harmonic distortion of both voltage and current is calculated from the harmonic data.

The measurement system is based on real-time digitization of the voltage and current waveforms using a 4K deep sample buffer. This time domain information provides detailed information on both voltage and current waveshapes. Waveform acquisitions can be triggered at a specific phase angle or from a transient program to allow precise positioning of the captured waveform with respect to the AC source output.

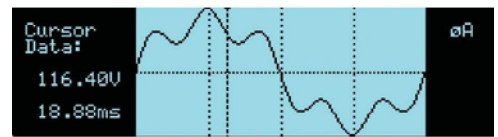


Acquired Current waveform (MX22.5/30/45 Display).

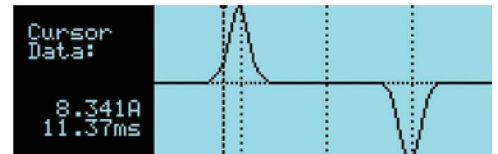

Acquired Voltage waveform (MX22.5/30/45 Display).

MEASUREMENTS 1			
VOLTAGE =	113.5VAC	FREQ =	60.0Hz
CURRENT =	36.9A	POWER =	4.11KW
PREVIOUS SCREEN		POWER =	

MEASUREMENTS1				oA	oB	oC
FREQ =	60.0 Hz					
VOLT AC =	120.51 U	119.92 U	120.31 U			
CURR =	9.342 A	8.453 A	9.129 A			
POWER =	0.782 KW	0.763 KW	0.734 K			
PREVIOUS SCREEN		POWER =				

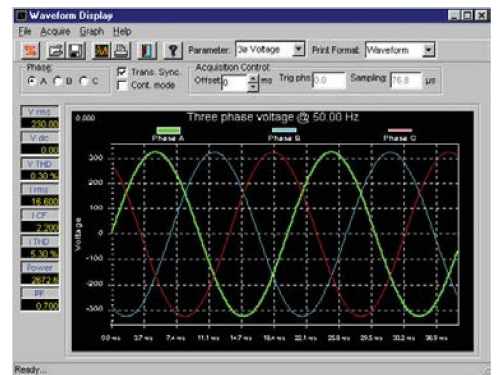

Model

Refer to table shown for model numbers and configurations

Supplied with

Standard: User Manual on CD ROM.

Pi version: User/Programming Manual and Software on CD ROM. RS232C serial cable.

Input Voltage Settings

Specify input voltage (L-L) setting for each MX system at time of order:

208	Configured for 208 V $\pm 10\%$ L-L, 4 wire input.
230	Configured for 230 V $\pm 10\%$ L-L, 4 wire input.
380	Configured for 380V +/- 10% L-L, 4 Wire Input (not avail on MX15)
400	Configured for 400 V $\pm 10\%$ L-L, 4 wire input.
480	Configured for 480 V $\pm 10\%$ L-L, 4 wire input
600	Configured for 600 V V $\pm 10\%$ L-L, 4 wire input (not avail on MX15)

Standard Model Options

Specify output range on standard models. All range values shown are Line to Neutral.

-150	Configured for 150 V AC and 200 V DC output ranges.
-300	Configured for 300 V AC and 400 V DC output ranges.
-P	IEEE-488 & RS232C Interface Adds programming, Windows & RS232 Cable.
-R	Range change. Provides 150/200 & 300/400 AC/DC output ranges. (Std. MX15)

Pi Model Options

-333	Configured for 166VAC and 333V AC L-N and 220/440 V DC output ranges
-ES	Emergency Shut Off with Key Release
-411	IEC 1000-4-11 test firmware.
-413	IEC 1000-4-13 Harmonics & Interharmonics test firmware.
-LF	Limits maximum frequency to 500 Hz.
-FC	Modifies output frequency control to $\pm 0.25\%$
-LAN	Ethernet Interface.
-HF	Increases max frequency to 905 Hz.
-HV	Adds 400 V L-N AC-only output range.
-HVC	Adds 0-400VAC L-N AC only output range with constant power mode.
-XV	Adds other AC-only output range. Consult factory for details.
-XVC	Adds other AC only output range with constant power mode. Consult Factory for details
-HF	Increases max. frequency to 905 Hz.
-LKM	Clock/Lock Master
-LKS	Clock/Lock Auxiliary
-WHM	Watt-Hour Measurement option.
-SNK	Bidirectional auto source and sink mode. Offers up to 100% power sink capability in AC mode of operation.
-SNK-DC	Sink DC current mode.
-EXTD	External Drive allows external signal control. (Not available on MX15)
Avionics Test Routine Options *	
-ABD	ABD0100.1.8 Test Option.
-AMD	Airbus AMD24 Test
-A350	Airbus Test Software
-B787	Boeing 787 Test Software
-160	RTCA/DO-160D, DO-160E, DO-160G, and EUROCAE test firmware.
-704	MIL-STD-704 A - F test - firmware/software.
-1399	MIL-STD-1399-300B shipboard power test software.

* Note: Reference the Avionics Test User Manual P/N 4994-971 for a complete listing of performance capabilities.

Packaging and Shipment

All MX systems are packaged in re-usable protective wooden crates for shipment.

MX Series II Specifications

AC Input										
Voltage	Must be specified at time of order. All inputs are L-L, 3ø, 3 wire + Gnd. 208 ± 10% VAC, 230 ± 10% VAC, 380V ± 10% VAC, 400 ± 10% VAC, 480 ± 10% VAC, 600V ± 10% VAC NOTE: 380VAC and 600VAC not available on MXI5									
Input Line Current (per phase) Steady State at full power load	Current Per Cabinet (MXI5)				Current Per Cabinet (MX22.5/30/45):					
	208	230	400	480	208	230	380	400	480	600
	58.3 ARMS	52.3 ARMS	30 ARMS	28 ARMS	89/116/175 ARMS	79/105/157 ARMS	49/62/95 ARMS	46/60/90 ARMS	38/50/75 ARMS	30/40/60 ARMS
Distortion	< 8% at full power, < 20% below 35% of power									
Line Frequency	47 - 63 Hz									
Efficiency	85 % typical									
Power Factor	0.95 typical									
AC Service										
Inputs/Outputs	MX22.5/30/MX45: Front and side access, cables routed through rear panel, exit in back. MXI5: Rear Access									
Regulatory	IEC/EN 61010-1									
EM	CISPR 11 / EN 55011, Class A, EN 61326-1, CE EMC (400 and 480 models)									
Connectors	AC Input & Output terminal block behind front cover. Rear Panel Connections: IEEE-488 (GPIB) connector Option, 9 pin Sub-DRS232C connector*, Remote voltage sense terminal block, System Interface Connector, DB-37, Ethernet connector Option. *RS232 DB9 to DB9 cable supplied.									
Physical Dimensions / Environmental										
MX22.5/30/45 Dimensions	Height: 50.0" (1270 mm), Width: 28.75" (731 mm), Depth: 34.5" (876 mm)									
MX22.5/30/45 Weight	Chassis: Net: 1150 lbs. / 522 Kg, Shipping: 1231 lbs. / 560 Kg, Amp Module: Net: 63 lbs. / 29 Kg, MX22.5: 875 lbs. / 398 Kg									
MXI5 Dimensions	Height: 31.75" (806 mm), Width: 24.0" (610 mm), Depth: 28.0" (711 mm)									
MXI5 Weight	Chassis: Net: 600 lbs. / 272 Kg, Shipping: 681 lbs. / 309 Kg, Amp Module: Net: 63 lbs. / 29 Kg									
Chassis	MX22.5, MX30, and MX45 Individual cabinets: Casters and forklift openings. MXI5: Casters									
Vibration and Shock	Designed to meet NSTA project 1A transportation levels. Units are shipped in wooden crate with forklift slots									
Air Intake/Exhaust	Forced air cooling, front air intake, rear exhaust									
Operating Humidity	0 to 95 %RH, non-condensing									
Temperature	Operating 0 to 40° C (30° max in CP mode), Storage: -20 to +85° C									
Programmable controller versions with dual voltage ranges										
			Voltage Ranges							
Mdel	AC Output Power	Phase Outputs	AC/AC+DC	DC	-HV Opt	333 Opt AC/AC+DC	-333 Opt DC	Controller		
MXI5-1Pi	15kVA	1	150/300	200/400	400VAC	166/333	220/440	Programmable		
MX22.5-3Pi	22.5 kVA	1 & 3	150/300	200/400	400VAC	166/333	220/440	Programmable		
MX30-3Pi	30 kVA	1 & 3	150/300	200/400	400VAC	166/333	220/440	Programmable		
MX45-3Pi	45 kVA	1 & 3	150/300	200/400	400VAC	166/333	220/440	Programmable		
MX90-3Pi	90 kVA	3	150/300	200/400	400VAC	166/333	220/440	Programmable		
MXI35-3Pi	135 kVA	3	150/300	200/400	400VAC	166/333	220/440	Programmable		
MXI80-3Pi	180kVA	3	150/300	200/400	400VAC	166/333	220/440	Programmable		
Pi models include IEEE-488, RS232C & USB interfaces, Advanced measurements, arbitrary waveform generation. Phase mode switching on MX22.5 3Pi, MX30-3Pi and MX45-3Pi.										
-MB Option										
Mdel	AC Output Power	Phase Outputs	Controller							
MX90-3Pi-MB	90 kVA	3	Dual MX45-3Pi							
MXI35-3Pi-MB	135 kVA	3	Triple MX45-3Pi							
MXI80-3Pi-MB	180kVA	3	Quad MX45-3Pi							
Steady state AC RMS Current in Regeneration mode (-SNK option)										
Mdel	Std/ Option	MXI5-1Pi	MX22.5-3Pi	MX30-3Pi	MX45-3Pi	MX60-3Pi	MX90-3Pi	MXI35-3Pi	MXI80-3Pi	
150V Range, 3 Phase	Standard	N/A	50A Ø	66.6A Ø	100A Ø	133.3A Ø	200A Ø	300A Ø	400A Ø	
150V Range, 1 Phase	Standard	100A	150A	200A	300A	N/A	N/A	N/A	N/A	
300V Range, 3 Phase	Standard	N/A	25A Ø	33.3A Ø	50A Ø	66.6A Ø	100A Ø	150A Ø	200A Ø	
300V Range, 1 Phase	Standard	50A	75A	100A	150A	N/A	N/A	N/A	N/A	
166V Range, 3 Phase	-333 Option	N/A	45A Ø	60A Ø	90.1A Ø	120A Ø	180.2A Ø	270.3A Ø	360.3A Ø	
166V Range, 1 Phase	-333 Option	90.1A	135A	180.1A	270.3A	N/A	N/A	N/A	N/A	
333V Range, 3 Phase	-333 Option	N/A	22.5A Ø	30A Ø	45A Ø	60A Ø	90.1A Ø	135A Ø	180.2A	
333V Range, 1 Phase	-333 Option	45A	67.5A	90.1A	135A	N/A	N/A	N/A	N/A	

MX Series II Specifications

15–180 kVA

Operating Modes

Pi Models: AC, DC and AC+DC, Non Pi Models AC only

AC Mode Output

Frequency	Range: 16.00-819.0 Hz, -LF Option: 16.00-500.0 Hz, -HF Option: 16.00-905 Hz (supplemental specifications apply above 819 Hz). Resolution: 0.01 Hz: 16.00 - 81.91 Hz, 0.1 Hz: 82.0 Hz - 819.1 Hz, SNK16-500Hz, EXID16-819Hz
Phase Outputs	MX15-1/15-1Pi: 1, MX22.5/30/45-3Pi: 1 or 3 switchable, Neutral: Floating, Coupling: DC (except for -HV option)
Total Power	MX15-1/1Pi: 15 kVA, MX22.5-1/3: 22.5 kVA, MX30-1/3: 30 kVA, MX45-1/3: 45 kVA, MX60: 60kVA, MX90: 90 kVA, MX135: 135 kVA, MX180: 180kVA
Load Power Factor	0 to unity at full output current

AC Mode Voltage

Voltage Ranges (Std Unit has 150 and 300VAC, 333 Option has 166 and 333VAC)	Range	VLow	VHigh	Regulation
	AC	0-150 / 0-166V	0-300 / 0-333 V	Load Regulation < 0.25 %FS DC to 100 Hz, < 0.5 %FS 100 Hz to 819 Hz
	AC+DC	0-150 / 0-166V	0-300 / 0-333V	Line Regulation < 0.1%FS for a 10 %line change
External Sense	Voltage drop compensation (5% Full Scale)			
Harmonic Distortion (Linear)	Less than 0.5% from 16 - 66 Hz; Less than 1% from 66 - 500 Hz; Less than 1.5% above 500 Hz			
DC Offset	< 20 mV			
Load Regulation	0.25%FS @DC - 100 Hz, 0.5%FS > 100 Hz			
External Amplitude Modulation	Depth: 0 - 10 % Frequency: DC - 2 KHz			
Voltage slew rate	200 μ s for 10% to 90% of full-scale change into resistive load, 0.5V / μ Sec			


AC Mode Current

Steady State AC Current @FS V (Std Unit has 150 and 300VAC -333 Option has 166 and 333VAC)	Model	MX15 1 Ph	MX22.5 3Ph / 1 Ph	MX30 3Ph / 1 Ph	MX45 3 Ph / 1 Ph	MX60 3 Ph	MX90 3 Ph	MX135 3 Ph	MX180 3 Ph
	VLow	150	100	50/ ϕ / 150	66.6/ ϕ / 200	100/ ϕ / 300	133.2/ ϕ	200/ ϕ	300/ ϕ
166		90.1	45/ ϕ / 135	60/ ϕ / 180.1	90.1/ ϕ / 27.3	120/ ϕ	180.2/ ϕ	270.3/ ϕ	360.3/ ϕ
VHigh	300	50	25/ ϕ / 75	33.3/ ϕ / 100	50/ ϕ / 150	66.6/ ϕ	100/ ϕ	150/ ϕ	200/ ϕ
	330	45	22.5/ ϕ / 67.5	30/ ϕ / 90.1	45/ ϕ / 135	60/ ϕ	90.1/ ϕ	135/ ϕ	180.2/ ϕ


Note: Constant power mode provides increased current at reduced voltage. See chart below

Peak Repetitive AC Current	MX30 and MX60 up to 4.5 / other MX models up to 3.0 (rms current at full scale voltage)
Programming Accuracy	Voltage (rms): ± 0.3 Vrms, Frequency: ± 0.01 % of programmed value, Current Limit: - 0 % to + 5 % of programmed value + 1A, Phase: $< 0.5^{\circ} + 0.2^{\circ} / 100$ Hz with balanced load
Programming Resolution	Voltage (rms): 100 mV, Frequency: 0.01 Hz from 16 - 81.91 Hz, 0.1 Hz from 82.0 - 819 Hz, Current Limit: 0.1A, 3 phase mode, 1.0A, 1 phase mode, Phase: 0.1 $^{\circ}$

Constant Power AC Mode - Available Max. AC Current

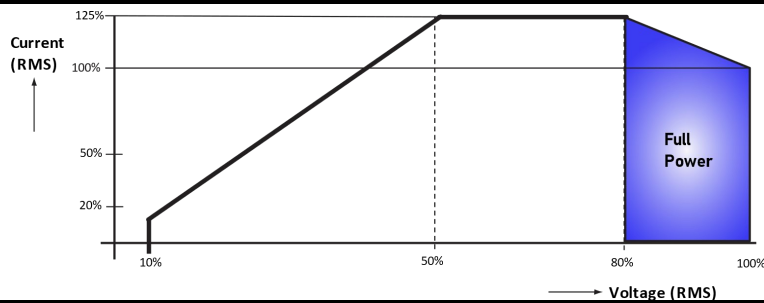

Chassis Dimensions

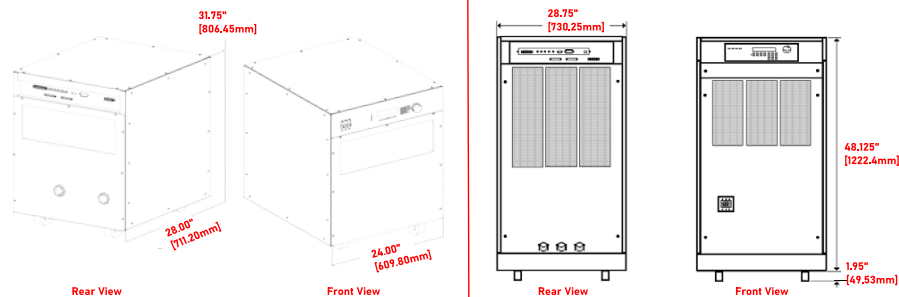

MX15

MX22.5, MX30, MX45 Single Chassis

MX Series II Specifications

Measurement														
Measurements - Standard (AC Measurements)	Parameter	Frequency	RMS Voltage	RMS Current	Peak Current	Crest Factor	Real Power	Apparent Power	Power Factor	Phase	DC Voltage	DC Current	DC Power	
	Range	16-100 Hz 100-820 Hz	400 V	0-160 A	0-400 A	0.00-6.00	0-15 kW	0-15 kVA	0.00-1.00	0.0-360.0	0-400 V	0-400 A	0-10kW	
	Accuracy* (±)	0.01%+ 0.01 Hz	0.05 V+ 0.02% 0.1V+ 0.02%	0.15 A+ 0.02% 0.3 A+ 0.02%	0.15 A+ 0.02% 0.3 A+ 0.02%	0.05 0.05	30 W+ 0.1% 60W+ 0.1%	30 VA+ 0.1% 60VA+ 0.1%	0.01 0.02	2.0° 3.0°	0.5 V	0.5 A	30W	
	Resolution *	0.01 Hz / 0.1 Hz	10 mV	10 mA	10 mA	0.01	10 W	10 VA	0.01	0.1°	10 mV	10 mA	10 W	
*Measurement system bandwidth = DC to 6.7 kHz. Accuracy specifications are valid above 100 counts. Current and Power Accuracy and Range specifications are times three for MX90, MX135, MX180 or MX30/45-3Pi in single phase mode. PF accuracy applies for PF > 0.5 and VA > 50 % of range														
Measurements - Harmonics	Parameter	Frequency Fundamental	Phase	Voltage	Current									
	Range	16.00-1000.0 Hz / 32.00 Hz - 16 kHz	0.0 - 360.0°	Fundamental Harmonics 2-50	Fundamental Harmonics 2-50									
	Accuracy* (±)	0.03%+ 0.03 Hz / 0.01 Hz	2° typ.	750 mV/0.3%+ 750 mV±0.3%/1 kHz	0.5 A/ 0.3%+ 150 mA +0.3%/1 kHz									
	Resolution	0.01 Hz	0.5°	10 mV/ 10 mV	100 mA/ 100 mA									
* Accuracy specifications are valid above 100 counts. Accuracy specifications are for three phase mode. Harmonics frequency range for MX30/45-3Pi in single phase mode is 32Hz- 48kHz														
DC Mode Output														
Power	Max DC power at full scale of DC voltage range. MX15-1Pi : (10 kW), MX22.5-3 Pi : (5kW per output, 3 outputs. 15kW in 1 channel mode, MX30-3Pi : (6.5kW per output, 3 outputs. 20kW in 1 channel mode), MX45-3Pi : (10kW per output, 3 outputs. 30kW in 1 channel mode)													
Voltage Ranges	Range: Low (0 - 200 V), High (0 - 400 V)													
Output Accuracy	± 1 Vdc													
Load Regulation	< 0.25 %FS													
Line Regulation	< 0.1%FS or 10 %line change													
Ripple	< 2 Vrms Lo Range, < 3 Vrms Hi Range													
Max DC Current @FSV per output. (Std Unit has 200 and 400VDC, -333 Option has 220 and 440VDC)	Model	MX15 1 Ph	MX22.5 3Phs / 1Phs	MX30 3Phs / 1Phs	MX45 3Phs / 1Phs	MX60 3Phs	MX90 3Phs	MX135 3Phs	MX180 3Phs					
	V _{Low}	200 220	50 45.4	25 / 75 22.7 / 68.2	33.3 / 100 30.3/90.1	50 / 150 45.4 / 136.3	66.6 60.6	100 90.9	150 136.3	200 181.8				
	V _{High}	400 440	25 22.7	12.5 / 37.5 11.35 / 34	16.6 / 50 15.1 / 45.4	25 / 75 22.7 / 68.2	33.2 30.2	50 45.4	75 68.1	50 90.9				
	Note: Constant power mode provides increased current at reduced voltage. See chart on previous page													
Current Limit	Programmable from 0 A to max current for selected range													
AC+DC Mode Output														
Output Power	Maximum current and power in AC+DC mode is same as DC mode													
Over Load	Constant Current or Constant Voltage mode													
Over	Automatic shutdown													
Non Volatile Mem. Storage	16 instrument setups, 200 user defined waveforms [Pi only]													
Waveforms														
Waveform Types	Std: Sine, Pi: Sine, Square, Clipped sine, User defined													
User defined waveform	Four groups of 50 user defined arbitrary waveforms of 1024 points for a total of 200. One group can be active at a time.													
System Interface														
Inputs	Remote shutdown, External Sync, Clock/Lock													
Outputs	Function Strobe / Trigger out, Clock/Lock													
Remote Control														
IEEE488 Interface	IEEE488 (GPIB) talker listener. Subset: AHL, CO, DCI, DTI, L3, PPO, RL2, SHI, SRI, T6, IEEE488.2 SCPI Syntax													
RS232C	9 pin Sub-D connector (Supplied with RS232C cable)													
LAN (-LAN Opt.)	Ethernet Interface: 10BaseT, 100BaseT, RJ45													
USB	Version: USB 1.1; Speed: 460 Kb/s maximum													
Output Relay	Push button controlled or bus-controlled output relay													
Output impedance (Not available with -SNK Option)	Programmable Z available on MX30-3Pi and MX45-3Pi in 3 phase mode only. Specifications apply at 50 Hz fundamental. Resistive: 1 - 200 mOhm, Inductive: 170 - 200 uH													

Note: Specifications are subject to change without notice. Specifications are warranted over an ambient temperature range of 25±5 °C. Unless otherwise noted, specifications are per phase for a sine wave with a resistive load and apply after a 30 minute warm-up period. For three phase configurations, all specifications are for L-N. Phase angle specifications are valid under balanced load conditions only.

© 2021 AMETEK Programmable Power All rights reserved. AMETEK Programmable Power is the trademark of AMETEK Inc., registered in the U.S. and other countries. Elgar, Sorensen, and California Instruments, are trademarks of AMETEK Inc., registered in the U.S.